




**Ar'dore**  
(HARMONY SERIES)

## SPECIFICATIONS

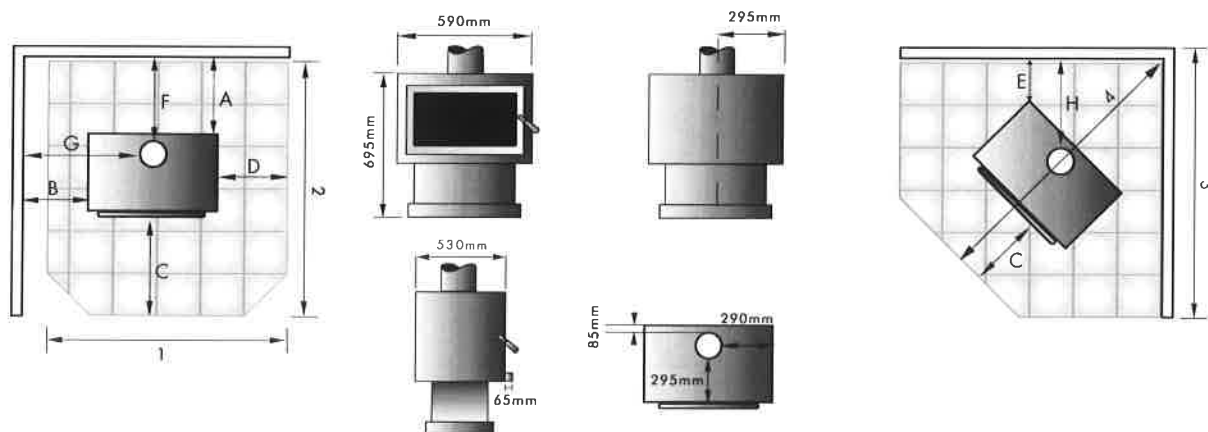

**NOTE: Ar'dore Harmony Series model must not be fitted with a Wetback/Waterbooster.**

**NOTE: Fuel must be loaded front to back in firebox in Milan Harmony Series models.**

*Minimum Clearance to Combustibles in Millimetres AS/NZS2918 : 2001*

New Zealand	A	B	C	D	E	F	G	H
With double s/s flue pipe shield	100	300	300	123	75	180	515	315
Without s/s flue pipe shield	325	400	300	123	200	410	615	440

*Floor Protector Dimensions*

1	2	3	4
840	930	1090	1240

*Note: The Ar'dore must be installed with a Milan Double Stainless Flue Shield*

### Floor Protector Requirements


The Milan Ar'dore Harmony Series requires a floor protector of non-combustible materials. The floor protector must extend under the heater, a minimum of 300mm in front of the door glass, and 123mm to either side of the heater. The minimum floor protector size for a wall setting installation is 930mm deep and 840mm wide.

### Seismic Requirements

The appliance and the floor protector shall be mechanically fixed to the floor itself. A provision has been made at the rear of the pedestal to fix through the two holes through floor protector and floor.

### Clearance Requirements

The Milan Ar'dore Harmony Series, when installed according to these instructions, complies with the provisions of AS/NZS2918 : 2001 Appendix B - "Thermal Testing of Installation Clearances".

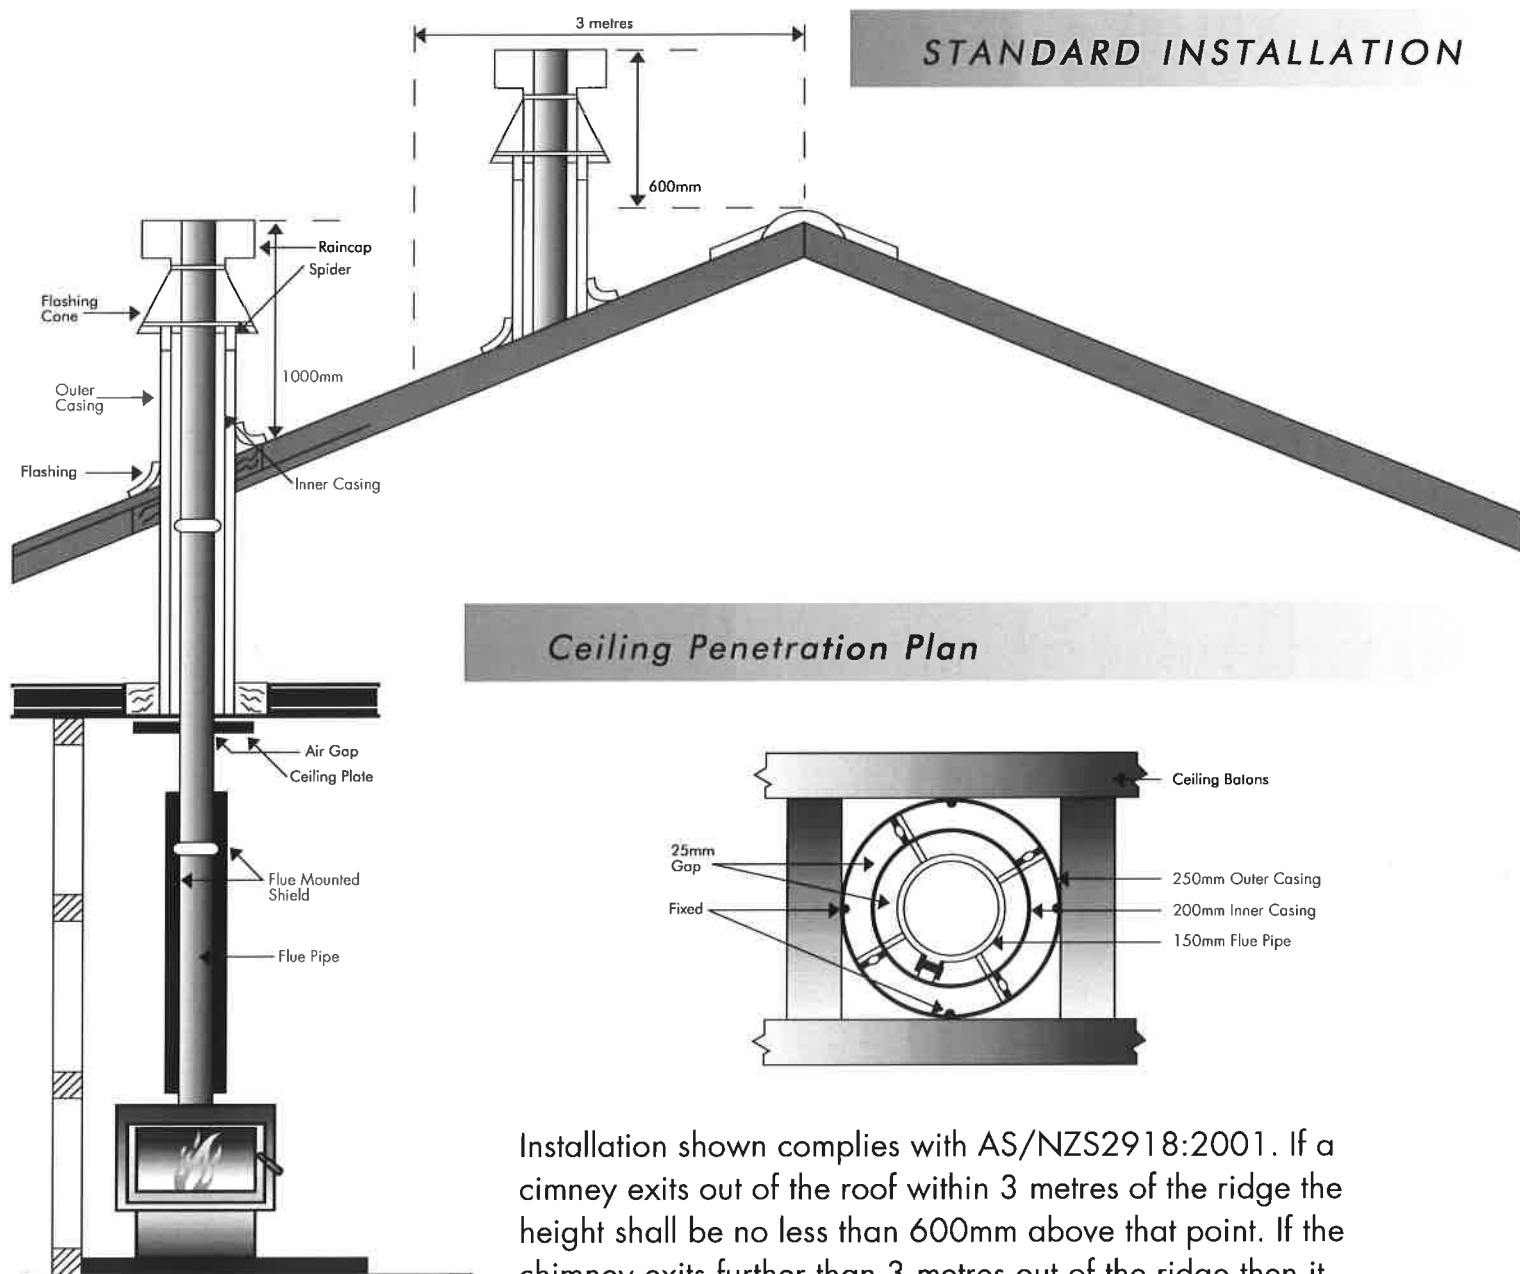

Installation shown complies with AS/NZS2918:2001. If a chimney exits out of the roof within 3 metres of the ridge the height shall be no less than 600mm above that point. If the chimney exits further than 3 metres out of the ridge then it should project 1000mm above roof penetration. No part of the building or any adjacent building may be in or above a circular area of horizontal radius of 3 metres from the flue exit.

For optimum performance overall flue length should be between 4.2m and 4.8m and have no bends. Flue pipes should be 150mm in diameter. Due to factors such as roof pitch, predominant winds, nearby obstructions (i.e. trees, buildings), and fire placement, flue lengths, hats and cowls may vary.