




Caldo Rad Rustic (HARMONY SERIES)

SPECIFICATIONS

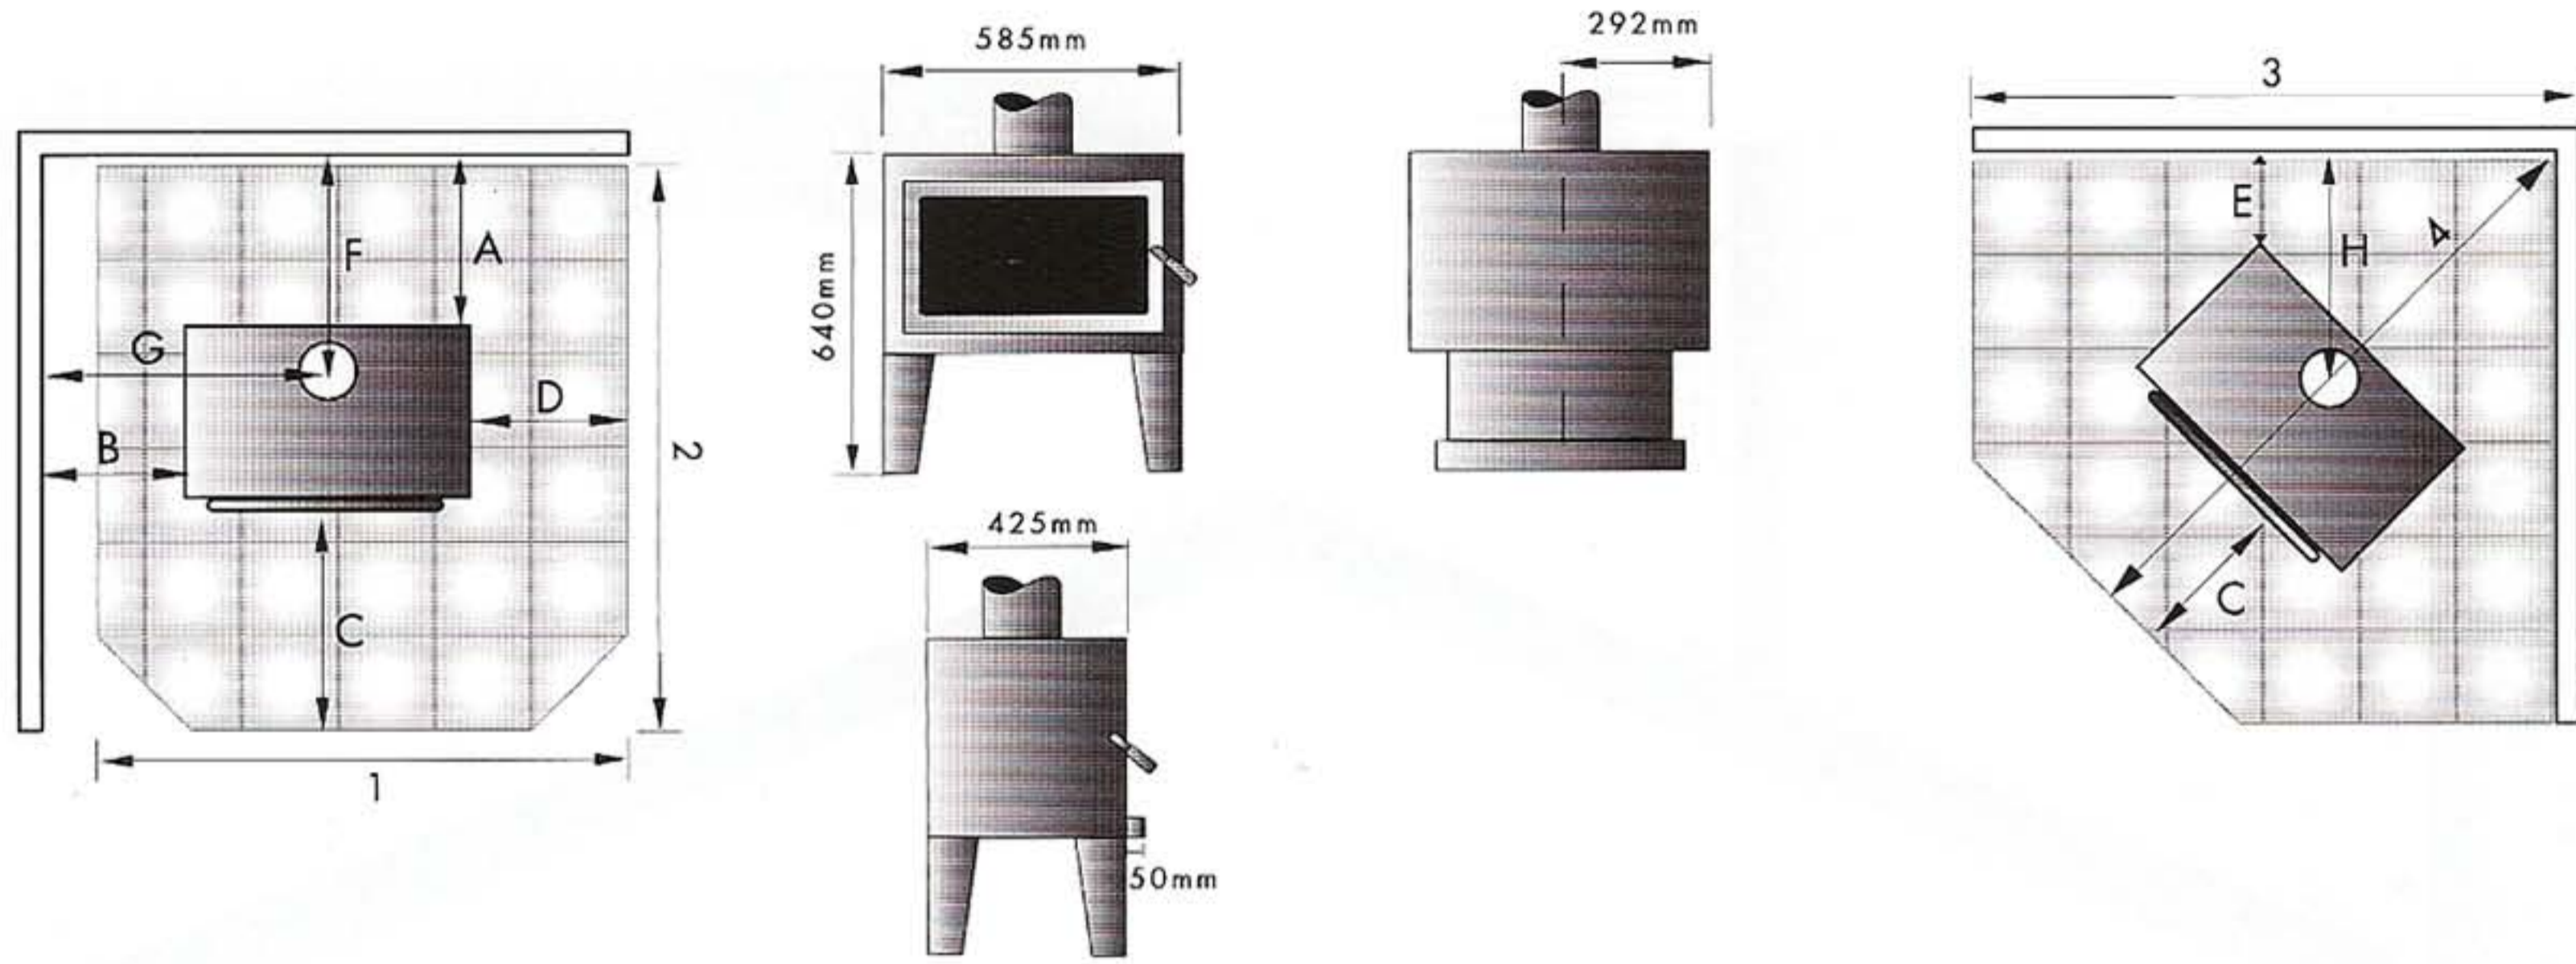

NOTE: Caldo Rad Rustic Harmony Series model must not be fitted with a Wetback/Waterbooster.

NOTE: Fuel must be loaded front to back in firebox in Milan Harmony Series models.

Minimum Clearance to Combustibles in Millimetres AS/NZS2918 : 2001

New Zealand	A	B	C	D	E	F	G	H
With s/s flue pipe shield	100	450	300	100	100	230	740	400

Floor Protector Dimensions

1	2	3	4
785	825	1030	1160

Floor Protector Requirements

The Milan Caldo Rad Rustic Harmony Series requires a floor protector of non-combustible materials. The floor protector must extend under the heater, a minimum of 300mm in front of the door glass, and 100mm to either side of the heater rear shield. The minimum floor protector size for a wall setting installation is 825mm deep and 785mm wide.

Seismic Requirements

The appliance and the floor protector shall be mechanically fixed to the floor itself. A provision has been made at the bottom of the 4 legs to fix through floor protector and floor

Clearance Requirements

The Milan Caldo Rad Rustic Harmony Series, when installed according to these instructions, complies with the provisions of AS/NZS2918 : 2001 Appendix B - "Thermal Testing of Installation Clearances". No provision is given for installing this woodfire without a flue pipe shield.